


(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
22 April 2004 (22.04.2004)

PCT

(10) International Publication Number
WO 2004/033251 A1

(51) International Patent Classification⁷: **B60N 2/28**

(21) International Application Number:
PCT/NO2003/000231

(22) International Filing Date: 2 July 2003 (02.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20023255 4 July 2002 (04.07.2002) NO

(71) Applicant (for all designated States except US): **HTS
HANS TORGENSEN & SØNN AS** [NO/NO]; N-3535
Krøderen (NO).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **RIKHOF, Johannes,
Hendrikus** [NL/NL]; Oude Dijk 51, NL-7588 RV Beunin-
gen (OV) (NL).

(74) Agent: **ONSAAGERS AS**; P.O.Box 6963 St. Olavs plass,
N-0130 Oslo (NO).

(81) Designated States (*national*): AE, AG, AL, AM, AT (util-
ity model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,
CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (util-
ity model), DE, DK (utility model), DK, DM, DZ, EC, EE
(utility model), EE, ES, FI (utility model), FI, GB, GD, GE,
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ,
LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,
MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO,
RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,
ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: **DEVICE FOR TIGHTENING A SEAT BELT**

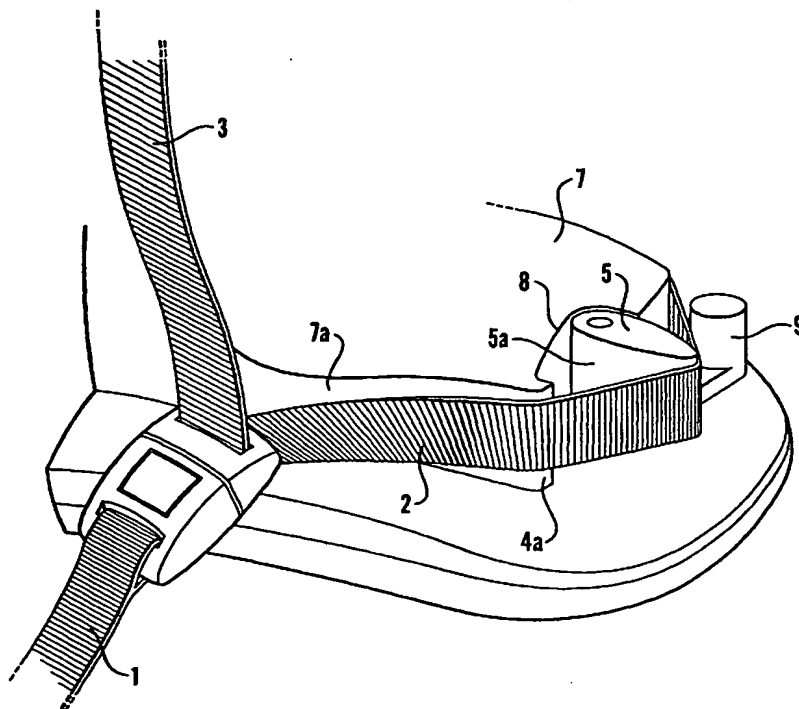

(57) Abstract: A device for tightening a seat belt (1) such as, for example, a three-point seat belt comprising a lap belt part (2) and a diagonal belt part (3), where the seat belt is used to fix a child car seat in a passenger seat. A portion of the seat belt preferably the lap belt part (2) is arranged in connection with the child car seat's lower portion (4). The device is characterised in that the lower portion (4) is designed with an abutment portion (4a) for placing a portion of the seat belt, preferably the lap belt part (2). Furthermore, a tightening unit (5) is rotatably mounted in at least one mounting point (6) in connection with the child car seat's lower portion (4). The lap belt part (2) is arranged in such manner that it abuts against portions of the abutment portion (4a) and the tightening unit (5) when the tightening unit (5) is located in an initial position. The tightening unit (5) is brought into a tightening position by rotating the tightening unit (5) about the mounting point (6), thus causing the distance between portions of the lap belt part (2) and the child car seat's lower portion (4) to increase, while contact is maintained between portions of the lap belt part (2) and the tightening unit (5). A tightening is thereby obtained of the lap belt part (2) and the child car seat is thereby pressed further in towards the passenger seat.

WO 2004/033251 A1